

# Geckolighting® 10w & 20w Slimline LED Floodlights




## Geckolighting® LED SLIMLINE Floodlights

Available in 10w and 20w versions. Robust lighting unit with polycarbonate lens (NO GLASS) for outside or inside applications including security and signage lighting, yards, open areas, sheds, mobile accommodation and display/feature lighting. Also cars, trucks and boats.

**Gecko LED** floodlights deliver long life, high performance and minimum power usage. Low voltage 12 or 24 volt DC or High voltage 85-265VAC. Standard is Cool White (6000-6500K).



Model Number	70-SFL10	70-SFL20
LED power:	10W	20w
Input Voltage	85-265VAC DC24V (option) DC12V (option)	
Frequency Range	50/60Hz	
Initial luminous flux:	>900lm	>1800lm
Power Factor(PF)	>0.95	
THD:	<15%	
Luminous efficiency:	>80-90lm/w	
Light efficiency:	>90%	
Operating temperature:	-30°C ~ +55°C	
Color Temperature	CW - Cool white: 6,000K WW - Warm white: 3,000K	
Color Index(CRI)	Ra>85	
Light Distribution Curve/Beam Pattern	Rectangular optical spot	
Lighting angle:	Horizontal axis 120°, vertical axis 60°	
Light Body & Lampshade	Aluminum Alloy and PC lens	
IP Rating:	IP65	
Working Life	50,000 Hrs	
Dimensions – Width x Height x Depth:	155mm(W) x 112mm(H) x 23mm(L)	215mm(W) x 155mm(H) x 31mm(L)
Net Weight	0.5Kg	1kg

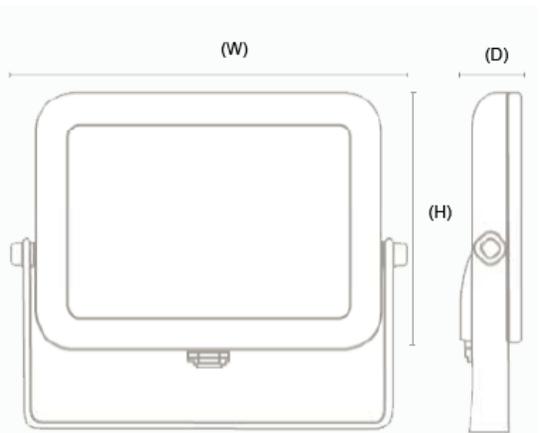

Geckolighting  
Phone: (08) 9248 6205  
Fax: (08) 9248 3501  
sales@geckolighting.com.au



www.geckolighting.com.au

