

Geckolighting® 25w LED Streetlight Head



Geckolighting® LED 25W Streetlight head.

Economical LED replacement for the 70w HPS 'Metro' style streetlight head. Robust & vibration tolerant, they are ideal for conveyor belt lighting. Operating voltage 85-265VAC. Also available with PE sensor.,

Features:

- Robust
- Compact light weight design
- Vibration tolerant
- Long life
- High light output
- 45mm diameter mounting base




Model Number:	90-SL25 90-SL25sens
LED power:	25w
Input Voltage:	85-265VAC
Frequency Range:	50/60Hz
luminous flux:	2,500lm
LED source:	25w 45*45mm Bridgelux
Luminous efficiency:	100lm/w
Power Factor(PF)	>0.95
Color Temperature:	Cool white: 6,000-6,500k standard.
Base mounting sleeve diameter:	45mm diameter
Beam Angle:	120° x 60°
Working Life:	30,000 Hrs
IP Rating:	IP65
Light Body & Lampshade	Aluminum Alloy and tempered Glass
Dimensions:	L350mm x W150mm x H60mm
Net Weight	1kg

Applications:

- Conveyor lighting
- General mining lighting
- Industrial lighting
- Residential streets
- Footpaths & access ways
- Security lighting
- Parks & gardens



Ideal replacement for
'Metro' type street light fitting.

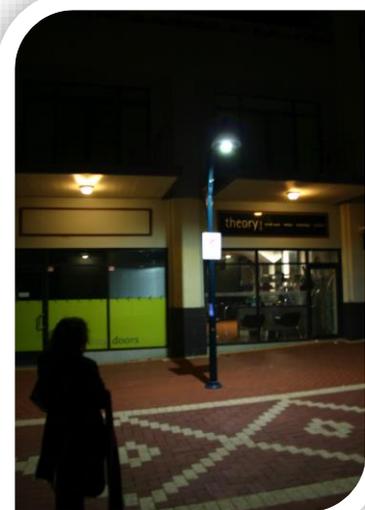

Geckolighting
Phone: (08) 9248 6205
Fax: (08) 9248 3501
sales@geckolighting.com.au



www.geckolighting.com.au

